

Intelligent cloud RFID reader

r1

User manual

Nov 10 2017



Embedded Electronics
&
Solutions, s.r.o.

www.eeas.cz




1. Device parameters

Power supply	PoE max. 48V
Power consumption	max. 1W
Switch parameters	250 VAC / 2A / 60W
USB interface (VCP)	115200/8/N/1
RFID standards	125 kHz ISO/EM4001 or Mifare 1k, Mifare 4k, UltraLight, DesFire and NFC NTAG203
Authentication algorithm	2k3DES with fixed length 16 bytes key

2. Factory settings

IP address	192.168.0.100
Subnet mask	255.255.255.0
Gateway	192.168.0.1
PHP port	80
Script URL	/script.php
Password	admin
Hash MD5	disable
Hash salt	salt
Heart beat period	60 seconds
Reader ID	0x00000001
Configuration port	5000
HTTP request port	80

3. Front view and connection schematic

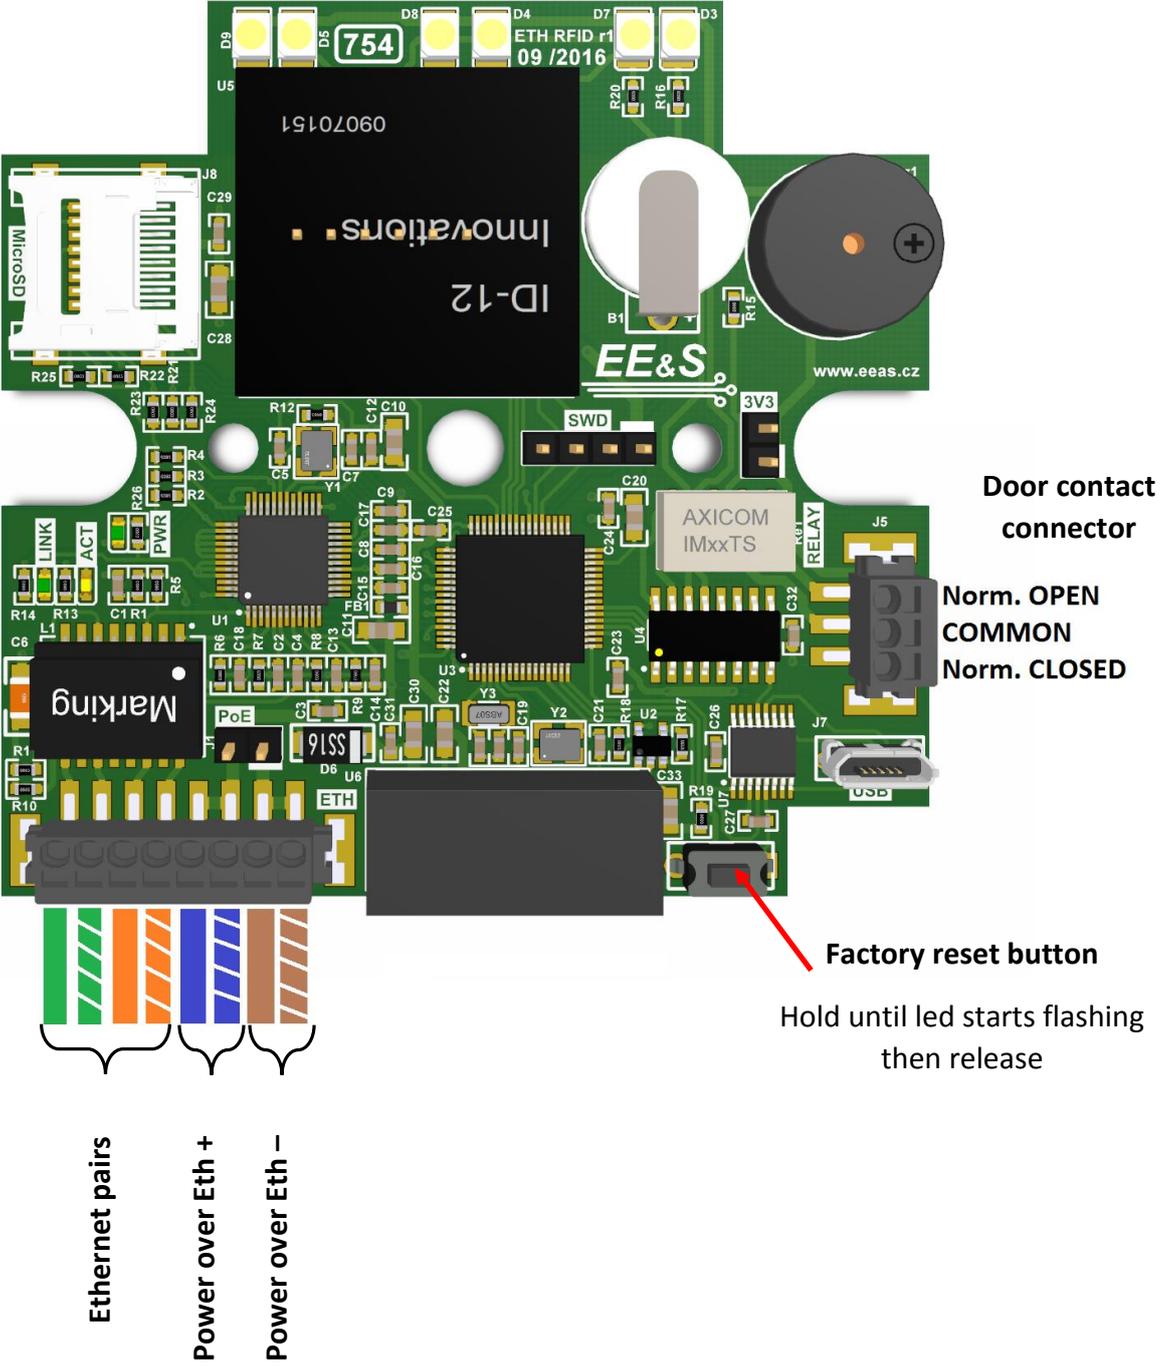

4. Description

The cloud reader is an electronic device providing a reading of 125 kHz ISO/EM4001 or Mifare 1k, Mifare 4k, UltraLight, DesFire and NFC NTAG203 RFID cards. The read card's IDs are transmitted via HTTP protocol into the cloud or PHP server. Parameters of the HTTP requests are modifiable via raw TCP connection using proprietary communication protocol described further in the manual. The reader is also listening to the HTTP request from PHP server and reacts to the commands transmitted through the request.

5. Communication interfaces

The reader is equipped with three communication interfaces. A raw TCP/IP server listening at port 5000 for reader configuration. The server also provides configuration of the HTTP request. An HTTP interface is intended for use in standard service. An USB interface is used as backup configuration interface and also for reader firmware update.

5.1. Configuration TCP server

The TCP server serves for a reader configuration. The user can connect to the server using a PC terminal such as netcat etc. A factory preset IP address and port are stated in the chapter 2. After successful opening the communication port user can write commands to the reader. List of all supported commands is stated in chapter 6. Each command has to be terminated by line feed character (`\n`, `0x0A`). An example of a start configuration of the reader is stated in a listing below. User commands are stated with **bold** characters and the reader reply with plain characters. The line feed character is shown as `\n`.

```
UNLOCK=admin\n  
OK\n  
PASS=password\n  
OK\n  
CLOCK=2016,10,1,12,34,56\n  
OK\n  
READID=1A2B3C4D\n  
OK\n  
IPADR=192,168,1,25\n  
OK\n
```

```
SNMASK=255,255,255,0\n  
OK\nGWADR=192,168,0,1\n  
OK\nWSADR=216,58,201,99\n  
OK\nWSURL=/rfid_script.php\n  
OK\nHASH=1\n  
OK\nSALT=salt\n  
OK\nRESET\n
```

5.2. HTTP interface

The HTTP interface serves for a normal operation of the reader. The interfaces implements a heart beat request, an asynchronous request when an RFID card was detected and receiving requests from host server.

5.2.1. Heart beat

If a heart beat request is enabled (see chapter 6.13) the reader periodically sends a HTTP request to the host server with a couple of parameters. An example of the HTTP heart beat request is shown on a listing bellow.

```
GET  
/rfid_script.php?hb=1&ts=20161018092311&readerid=  
00000001&hash=E82EE47E3F15470F8A6D30C21B80F2C2  
HTTP/1.1\nHost: 216.58.201.99\nConnection: close\n\n
```

The request includes following parameters

<i>hb</i>	heart beat indicator,
<i>ts</i>	time stamp in format yyyyMMddHHmmss,
<i>readerid</i>	ID of the reader sending the heart beat,
<i>hash</i>	hash code computed from all parameters.

If the hash code computation is enabled (see chapter 6.11 and 6.12) the hash is computed following way. The MD5 algorithm is used. The input string is assembled from the parameters *hb*, *ts*, *readerid* and *salt* in ACSII form without any separating characters. If salt string is set to "salt" then the hash input string from the HTTP request example above is

```
12016101809231100000001salt
```

The time period of sending the heart beat is adjustable by command desribed in chapter 6.13. The host server IP address and the script URL are adjustable using the commands described in chapter 6.6 and 6.8.

5.2.2. Asynchronous HTTP request from reader

When an RFID card was detected and succesfully read an anysonchornous HTTP request is sent to the host server. An example of the request is show on a listing bellow.

```
GET
/script.php?card=09002518D4E0&card_i=2431188&ts=2
0161018094102&readerid=00000001&auth=1&hash=93148
62E0A78E896BC887E887085091B HTTP/1.1\n
Host: 130.193.9.19\n
Connection: close\n
\n
```

The request includes following parameters

<i>card</i>	RFID card ID in hex format,
<i>card_i</i>	RFID card ID in decimal format,
<i>auth</i>	<i>DESFire authentication result</i>
<i>ts</i>	time stamp in format yyyyMMddHHmmss,
<i>readerid</i>	id of the reader sending the request,
<i>hash</i>	hash code computed from all parameters.

The *card_i* parameter is computed as a decimal form of middle four bytes of the paramter *card*. For numbers from example above the procedure is following.

buffering is enabled the reader buffers the detected cards and sequentially sends the asynchronous requests as the server reply of the previous card was received. If the buffer is full the detected cards are discarded. If the card buffering is disabled all cards detected during the wait for reply period (see chapter 6.30) are discarded. The next card is processed after the server reply is received or the reply timeout is exceeded.

5.2.3. Asynchronous HTTP request from host server

If there is a need to address the reader asynchronously from the host server the reader is listening to the port 80 for incoming HTTP requests. For example the host server executes the following link

```
http://192.168.0.25/?CMD=1&TOKEN=aaaa
```

with parameters

<i>CMD</i>	specify to the reader to expect incoming commands,
<i>TOKEN</i>	token expected in reader reply.

After the request is received the reader sends another HTTP GET request directly to the host server with IP and URL set by the commands described in chapters 6.6 and 6.8. The format of the request is following

```
GET
/script.php?CO=1&TOKEN=aaaa&ts=20161018094348&readerid=00000001&hash=9AF6601BBA054EE1B6C07E27B9793
C8A HTTP/1.1\n
Host: 130.193.9.19\n
Connection: close\n
\n
```

with parameters

<i>CO</i>	specify to the server to prepare commands,
<i>TOKEN</i>	token from host server HTTP request,
<i>ts</i>	time stamp in format yyyyMMddHHmmss,
<i>readerid</i>	id of the reader sending the request,
<i>hash</i>	hash code computed from all parameters.

The hash code (if is enabled) is computed the same way as was described in chapter 5.2.1 from the parameters *co*, *token*, *ts* and *readerid*. The host server

IP address and the script URL are adjustable using the commands described in chapter 6.6 and 6.8.

In the body of the HTTP response from the server there could be included commands for the reader. The format of the HTTP body is discussed in the chapter 5.3.

5.3. HTTP body commands formatting

The host server sends commands to the reader in the body of the HTTP reply. The format of the reply is the same for both cases described in chapters 5.2.2 and 5.2.3. After the host server received an HTTP request from the reader the host have to reply to the reader with a batch of commands. For example flashing the leds or switching on the relay. The commands have to be included in the body of the HTTP response surrounded by <EEAS> and </EEAS> tags. All commands have to be terminated by line feed character (\n, 0x0A). The reader accepts commands described in the chapter 6.

An example of the reply is shown in the listing bellow. It shows a basic response commanding to flash green led for 1 second and beep the buzzer. An example of the script implementation itself is stated in chapter 7.

```
<EEAS> \n
LEDG=10\n
BUZZER=10\n
</EEAS>
```

5.4. USB interface

The USB interface is used only for service reasons. In a normal operation it is not necessary to use it.

If you connect the reader via USB cable to the PC, the reader acts as a virtual COM port with parameters 115200/8/N/1. The reader implements the same set of commands as in the case of TCP configuration server, so user could also use the USB interface to configure the reader.

6. List of commands

6.1. Unlock

Unlock read-only mode and allow to set up reader parameters.

UNLOCK=<password>

password password, default value = admin

6.2. Clock

Update internal real time clock timer bz current date and time.

CLOCK=<yyyy>,<MM>,<dd>,<HH>,<mm>,<ss>

CLOCK=2016,1,1,12,0,0

<i>yyyy</i>	year
<i>MM</i>	month
<i>dd</i>	day
<i>HH</i>	hours
<i>mm</i>	minutes
<i>ss</i>	seconds

Query:

CLOCK?

Reply:

<yyyy>,<MM>,<dd>,<HH>,<mm>,<ss>

6.3. IP address

Set reader IP address. The changes will be applied after Reset command.

IPADR=<ip1>,<ip2>,<ip3>,<ip4>

IPADR=192,168,0,100

<i>ip1</i>	first byte of IP address
<i>ip2</i>	second byte of IP address
<i>ip3</i>	third byte of IP address

ip4 fourth byte of IP address

Query:

IPADR?

Reply:

<ip1>,<ip2>,<ip3>,<ip4>

6.4. Subnet mask

Set reader subnet mask. The changes will be applied after Reset command.

SNMASK=<sm1>,<sm2>,<sm3>,<sm4>

SNMASK=255,255,255,0

<i>sm1</i>	first byte of subnet mask
<i>sm2</i>	second byte of subnet mask
<i>sm3</i>	third byte of subnet mask
<i>sm4</i>	fourth byte of subnet mask

Query:

SNMASK?

Reply:

<sm1>,<sm2>,<sm3>,<sm4>

6.5. Default gateway

Set reader default gateway. The changes will be applied after Reset command.

GWADR=<gw1>,<gw2>,<gw3>,<gw4>

GWADR=192,168,0,1

<i>gw1</i>	first byte of gateway IP address
<i>gw2</i>	second byte gateway of IP address
<i>gw3</i>	third byte of gateway IP address
<i>gw4</i>	fourth byte of gateway IP address

Query:
GWADR?

Reply:
<gw1>,<gw2>,<gw3>,<gw4>

6.6. PHP/Cloud server IP address

Set IP address of the requested PHP/Cloud server.

WSADR=<ip1>,<ip2>,<ip3>,<ip4>

WSADR=192,168,0,2

<i>ip1</i>	first byte of IP address
<i>ip2</i>	second byte of IP address
<i>ip3</i>	third byte of IP address
<i>ip4</i>	fourth byte of IP address

Query:
WSADR?

Reply:
<ip1>,<ip2>,<ip3>,<ip4>

6.7. PHP/Cloud server port

Set port of the requested PHP/Cloud server.

WSPRT=<port>

WSPRT=5000

<i>port</i>	TCP port for communication with a cloud
-------------	---

Query:
WSPRT?

Reply:
<port>

6.8. PHP/Cloud script URL

Set URL of the processing PHP script.

WSURL=<url>

WSURL=/script.php

url string of script URL with max. 64 charecters

Query:

WSURL?

Reply:

<url>

6.9. PHP/Cloud host name

Set Host name of the server providing PHP script.

HOST=<string>

WSURL=216.58.209.67

WSURL=www.eeas.cz

string string of the host with max. 64 charecters

Query:

HOST?

Reply:

<string>

6.10. Reader ID

Set reader ID that is used to identify reader in HTTP requests.

READID=<id>

READID=1A2B3C4D

6.13. Heart beat period

Set period of sending a heart beat request.

HBRATE=<period>

HBRATE=60

period

period in seconds

Query:

HBRATE?

Reply:

<period>

6.14. Enable card buffering

Enable card buffering. The depth of the buffer is 64 card IDs. Reset must be applied after this command.

BUFF=<enable>

BUFF=1

enable

0 – disable; 1 – enable

Query:

BUFF?

Reply:

<enable>

6.15. Password

Set new password.

PASS=<password>

PASS=amin

password

string, max. 20 characters, no space

6.16. Set DESFire key

Set the DESFire key used for a card authentication.

DESFIREKEY=<key>

DESFIREKEY=ABCDEF0123456789ABCDEF0123456789

key hexadecimal number, exactly 32 characters, each
2 characters represent one byte

Reply:

OK

6.17. Reset

Reset device and apply new settings. It may take a few seconds

RESET

6.18. Hold relay

Set relay for a specified time.

RELAY=<time>

RELAY=10

time time in 100 ms (10 == 1 second)

Reply:

OK

6.19. Set relay

Set relay permanently.

RELON

Reply:

OK

6.20. Reset relay

Release relay permanently.

RELOFF

Reply:

OK

6.21. Flash green led

Flash green led for a specified time.

LEDG=<time>

LEDG=10

time

time in 100 ms (10 == 1 second)

Reply:

OK

6.22. Set green led

Turn on green led permanently.

LEDGON

Reply:

OK

6.23. Reset green led

Turn off green led permanently.

LEDGOFF

Reply:

OK

6.24. Flash red led

Flash red led for a specified time.

LEDR=<time>

LEDR=10

time time in 100 ms (10 == 1 second)

Reply:

OK

6.25. Set red led

Turn on red led permanently.

LEDRON

Reply:

OK

6.26. Reset red led

Turn off red led permanently.

LEDROFF

Reply:

OK

6.27. Beep buzzer

Beep buzzer for a specified time.

BUZZER=<time>

BUZZER=10

time time in 100 ms (10 == 1 second)

Reply:

OK

6.28. Set buzzer

Turn on buzzer permanently.

BUZZON

Reply:

OK

6.29. Reset buzzer

Turn off buzzer permanently.

BUZZOFF

Reply:

OK

6.30. Wait for reply

Wait for reply indication for a specified time. After a card is detected then orange LEDs starts to flash until the specified timeout is exceeded or the server reply is received.

RWAIT=<time>

RWAIT=50

time

time in 100 ms (10 == 1 second)

Reply:

OK

Query:

RWAIT?

Reply:
<time>

6.31. Get FW version

Returns reader firmware build date.

Query:
VER?

Reply:
Ethernet RFID r1 build: <date MMM d yyyy>
Ethernet RFID r1 build: Nov 10 2017

7. Example of a PHP script

The following example shows how to implement a PHP script reacting to the reader. The script checks the read card_id and depending on this paramters decides to flash red or green led.

```
<?php
echo "<EEAS>\n";
$card_id = $_GET["card"];
if( $card_id == "09002518D4E0" )
{
    echo "LEDG=1\nBUZZER=1\n";
}
else
{
    echo "LEDR=1\nBUZZER=1\n";
}
echo "</EEAS>";
?>
```


***On behalf of
Embedded Electronics & Solutions, s.r.o.
we would like to thank you.***

Manufacturer:



Embedded Electronics & Solutions, s.r.o.

Primátorská 296/38

180 00 Praha 8

www.eeas.cz

Phone: +420 731480348 / +420 737980953

Distributor in Slovakia:



T-Industry, s.r.o.

Hoštáky 910/49

907 01 Myjava

tind@tind.sk

www.tind.sk

Phone: +421 907565722